

Remote Indicator Unit

Data Sheet



Description

The RI/W/3V remote indicator unit is designed for fire detection systems requiring local indication of an individual or group of fire detectors in alarm. The unit is fitted with LED providing a wide area of illumination and high on/off contrast for easy viewing.

Using a single gang purpose designed moulding, the unit operates with all Notifier analogue addressable fire detectors.

Features

- Industrial construction
- Terminal block wiring
- Ultra-bright LED
- Suitable for analogue addressable systems.

Specifications

RI/W/3V remote indicator unit

Mechanical Specification

	RI/W/3V
Height:	100mm
Width:	89mm
Body colour:	white with red lettering
Wire gauge for terminals:	1.5mm ²
Mounting	Designed to fit to a standard UK BS1363 single gang back-box


Electrical Configuration

	RI/W/3V
Operating voltage:	5 - 28 V dc

System	Resistance	Terminals	Current
Addressable	0Ω	2,3	28 mA Max

Installation Recommendations

For analogue addressable systems connect across LED (terminals 2 & 3)

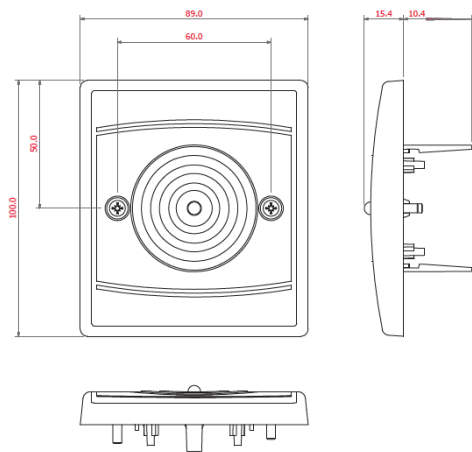

Dimensions: mm

Product Range at a Glance

	Part Number
 Remote Indicator Unit	RI/W/3V